

**Flügelbetondose flach -
Einfach vier mal festbinden - fertig!**

- » Für Fertiggaragen, dünne Betonwände
- » 70% Zeitersparnis bei der Montage
- » Normabstand 15 cm zur Türschalung
- » Kombinierbar, absolut feste Verbindung
- » Für Betondecken von 20 - 60 mm
- » Für DIN EN Rohre bis Ø 25 mm
- » Montage der umgedrehten flachen Flügelbetondose ermöglicht eine Betondeckung von 20 – 45 mm


Produkteigenschaften

Durchmesser	60 mm
Tiefe	55 mm
Länge inkl. Flügel	300 mm
DIN	0606-1
DIN	49073
Schraubdomo	4 (auf beiden Seiten)
Anzahl Rohreinführungen (ausfräsen oder ausstanzen)	2 x M20 oder 2 x M25
Norm-Kombinationsabstand	71 mm
Querschnitt ohne Gerät (1,5 mm)	6 Klemmen, 20 Leiter
Querschnitt ohne Gerät (2,5 mm)	5 Klemmen, 15 Leiter
Farbe	blau

Serie	-
Artikelnummer	P588
Kategorie	Betoninstallation
Montageart	Flügel
Einsatz	Ortbeton
EAN	4260182061121

Materialeigenschaften

Material	PP
----------	----

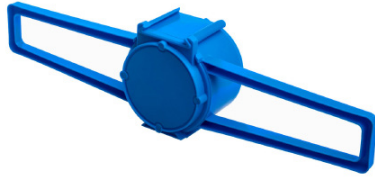

**Concrete wing box flat -
Simply tie four times - done!**

- » For prefabricated garages, thin concrete walls
- » 70% time saving during assembly
- » Standard distance 15 cm from the door formwork
- » Combinable, absolutely secure connection
- » For concrete ceilings from 20 - 60 mm
- » For DIN EN conduits up to Ø 25 mm
- » Mounting of the inverted flat wing concrete box allows concrete cover from 20 - 45 mm

Product features

Diameter	60 mm
Depth	55 mm
Length inc. Wings	300 mm
DIN	0606-1
DIN	49073
Screw domes	4 (on both sides)
Number of conduit entries (milled out or stamped)	2 x M20 or 2 x M25
Standard combination distance	71 mm
Cross-section without device (1,5 mm)	6 Clamps, 20 conductors
Cross-section without device (2,5 mm)	5 Clamps, 15 conductors
Color	blue

Series	-
Article No.	P588
Category	Concrete installation
Type of installation	Wings
Use	cast-in-place concrete
EAN	4260182061121

Material properties

Material	PP
----------	----